

tric actuator, a resonating chamber similar to a Helmholtz chamber is formed.

This work was done by Stanley E. Woodard, Robert L. Fox, and Robert G. Bryant of Langley Research Center. For

further information, write to R. P. Turcotte, NASA Langley Research Center: postal address 3 Langley Boulevard, Mail Stop 200, Hampton, VA 23681-2199; telephone (757) 864-8881; fax (757) 864-8314; e-mail address r.p.turcotte@lar.nasa.gov.

This invention is owned by NASA, and a patent application has been filed. Inquiries concerning nonexclusive or exclusive license for its commercial development should be addressed to the Patent Counsel, Langley Research Center; (757) 864-3521. Refer to LAR-15959.

● Photovoltaic Power Station With Ultracapacitors for Storage

Ultracapacitors offer advantages over batteries in this application.

John H. Glenn Research Center, Cleveland, Ohio

The figure depicts a solar photovoltaic power station in which ultracapacitors, rather than batteries, are used to store energy. Developments in the semiconductor industry have reduced the cost and increased the attainable efficiency of commercially available photovoltaic panels; as a result, photovoltaic generation of power for diverse applications has become practical. Photovoltaic generation can provide electric power in remote locations where electric power would otherwise not be available. Photovoltaic generation can also afford independence from utility systems. Applications include supplying power to scientific instruments and medical

equipment in isolated geographical regions.

The reasons for choosing ultracapacitors instead of batteries in this power station are the following:

- Batteries are not particularly suitable for storing energy generated in photovoltaic power systems. Batteries must be kept adequately charged, and are not permitted to be completely discharged. The variability of available sunlight makes it difficult to satisfy this requirement.
- Batteries must be sized to accommodate peak load currents, which are usually much greater than average load currents.

- Batteries have rather short cycle lives and their internal chemical reactions cause deterioration over time.
- Batteries perform poorly at low temperatures.
- Ultracapacitors make it possible to overcome most of the aforementioned disadvantages of batteries.

The ultracapacitors in this power station are electrochemical units. Because these capacitors contain large-surface-area electrodes with very small interelectrode gaps, they have large volumetric capacitances. Capacitors can have cycle lives that are extremely long, relative to those of batteries; indeed, it may never become necessary to replace capacitors.

Dual Intel Xeon® Processors High Performance and Rugged Portable Server

The high performance PServer series combines a dual Intel Xeon processor system with four drive bays and an LCD screen up to 17" all in a rugged aluminum chassis. The PServer can be easily customized with its add-on card capability and multi-slot design. With the power of a server computer and the mobility of notebook computing, PServer can be deployed into the dirty, arduous, and demanding environments of military and aviation applications and scientific laboratories and expeditions.

- Dual Intel Xeon processors up to 3.06GHz, 533MHz FSB.
- Up to 12GB of PC3200 DDR SDRAM.
- RAID 0,1,5 configurable hard drives.
- Ruggedized aluminum alloy chassis.
- 15.4", 17" LCD.
- 15.1" 400 nit sunlight-readable LCD.



Finalist: FieldGo M5 Rugged Portable



Server Console with KVM Panel Computer



since 1986


Broadax Systems, Inc.

1-800-872-4547

GSA# GS-35F-0496K

www.bsicomputer.com

17539 E. Rowland Street City of Industry, CA 91748 tel: 626-964-2600 fax: 626-964-2665

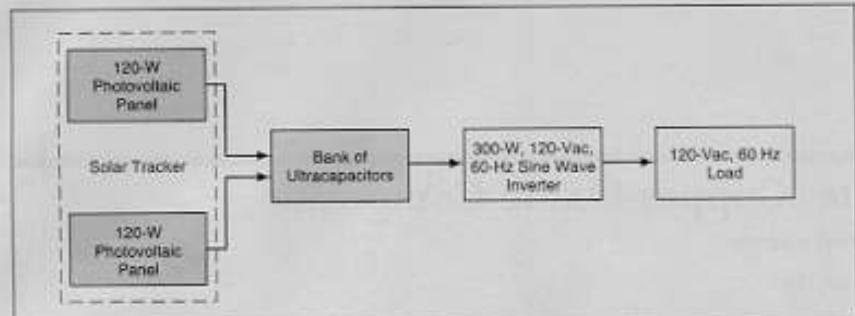

This Photovoltaic Power Station utilizes ultracapacitors (instead of batteries) as energy-storage devices.

The longevity of capacitors increases reliability, reduces life-of-system costs, and reduces adverse environmental effects. The longevity of capacitors is especially desirable for photovoltaic power systems, which are kept in service continuously for many years.

The power densities of capacitors exceed those of batteries. Therefore, high power can be drawn as needed and then capacitors can be recharged very quickly in preparation for the next high power demand. Capacitors have excellent low-temperature characteristics, continue to function without need for maintenance, and perform consistently over time. In addition, capacitors are conducive to safety in that it is easy to discharge them and they can be left completely discharged.

The present power station includes two 5-by-2-ft (1.5-by 0.6-m) all-weather photovoltaic panels, each rated at a power of 120 W. The photovoltaic panels are connected in parallel to provide up to 240 W at a potential of 16.9 V. The photovoltaic panels are mounted on a solar tracker for tracking the path of the Sun to maintain efficiency (at up to 50 percent more than the attainable efficiency of panels mounted in a fixed orientation). The tracker is a thermally actuated device; it exploits solar heating and consequent differential thermal expansion to change the orientation of the panels.

The outputs of the photovoltaic panels are sent to the bank of ultracapacitors for energy storage. Capacitors are excellent for this application in that a complex voltage regulator is not needed, as it would be if batteries were used. The ultracapacitors can tolerate voltage variations up to their maximum voltage rating. The ultracapacitors feed a 300-W, 60-Hz sine-wave inverter for powering various ac loads. A sine-wave inverter was chosen to minimize the generation of noise and to supply clean power to the load.

Additional photovoltaic panels and ultracapacitors can easily be added to sat-

isfy an increased power demand. The photovoltaic panels and ultracapacitors in this power station have a minimum expected life of 25 years.

This work was done by Dennis J. Eichenberg, John S. Kolack, Richard F. Soltis, and Paul F. Tavernelli of Glenn Research Center.

Inquiries concerning rights for the commercial use of this invention should be addressed to NASA Glenn Research Center, Commercial Technology Office, Attn: Steve Fedor, Mail Stop 4-8, 21000 Brookpark Road, Cleveland, Ohio 44135. Refer to LEW-17177.

SIGNAL CONDITIONING SOLUTIONS

SENDING MIXED SIGNALS?

Convert, Isolate, and Amplify Your Critical I/O Signals with Phoenix Contact MCR Modules.

Phoenix Contact's compact DIN-rail mounted signal interface devices are the simple, economical way to assure clear, uninterrupted communications between field devices and controllers—without adding expensive, dedicated function cards.

CONVERSION

Convert industrial signals to standard 4-20mA signals for monitoring and control applications.

ISOLATION

Isolate, amplify, and filter signals from harsh industrial interference, enhancing system reliability.

TEMPERATURE

Convert temperature signals from RTDs, thermocouples and sensors with universal PC-programmable or dedicated switch configurable devices. Available with HART compatibility.

LOAD CELL/STRAIN GAGE

Conversion and 3-way isolation with industrial and scientific features for static and dynamic measurement.

CURRENT CONVERSION

Measure and convert ac/dc current and voltage signals into standard analog signals.

Call 1-800-322-3225 or visit www.phoenixcon.com/MCR

SIGNAL CONDITIONING • INDUSTRIAL WIRELESS • HAZARDOUS AREAS
• SURGE PROTECTION • POWER SUPPLIES • INDUSTRIAL NETWORKS
• CONTROLLER CABLING • RELAYS • TERMINAL BLOCKS

PHOENIX CONTACT
INNOVATION IN INTERFACE